

Lightning and Overvoltage Protection
ProTube T1HS 0+1
 Class I • Class II • Type 1 • Type 2 • Type 4CA



Location of Use: Main Distribution Boards
 Network Systems: TT, TN-S
 Mode of Protection: N-PE
 IEC/EN/UL Category: Class I+II, Type 1+2, Type 4CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11: 2012+A11:2018
 UL 1449 5th Edition

Technical Data

ProTube T1HS-xxx-0+1(-R)

100

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o / U_n	240 V
Maximum Continuous Operating Voltage (AC)	U_c	305 V
Nominal Discharge Current (8/20 μ s)	I_n	100 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	130 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	100 kA
Specific Energy	W/R	2500 kJ/ Ω
Charge	Q	50 As
Voltage Protection Level	U_p	1500 V
Rated Load Current	I_L	100 A
Response Time	t_A	< 100 ns
Follow Current Interrupt Rating	I_{fi}	100 A
TOV Withstand 200ms	U_T	1200 V
Number of Ports		1

UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	305 V
Measured Limiting Voltage	MLV	1000 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA

Additional Electrical Parameters (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	305 V
---	-----------	-------


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Altitude		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		4 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5mm ² (Solid)

Internal Configuration

Legend

- L* Line Conductor Terminal
- N* Neutral Conductor Terminal
- \perp PE/G Conductor Terminal
- RC* Remote Contacts Terminal (Optional)
- TD* Thermal Disconnect




ProTube T1HS-xxx-0+1(-R)

Order Information

Order Code	100
ProTube T1HS-xxx-0+1	59.A596
ProTube T1HS-xxx-0+1-R (with remote contacts)	59.A597
ProTube T1HS-100-01-P (plug)	59.0720


Dimensions & Packaging

inches [mm]

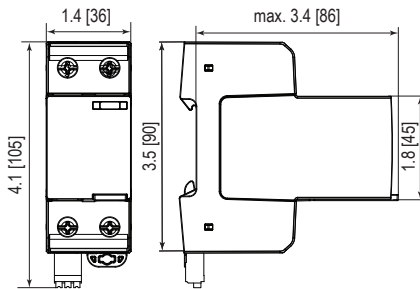

Complete Unit		
ProTube T1HS-xxx-0+1		300
Weight	pounds [grams]	.496 [225]
ProTube T1HS-xxx-0+1-R		
Weight	pounds [grams]	.515 [234]
DIN 43880 Dimension		2 TE / 1.42 [36]
Packaging Dimensions (HxWxL)		4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity		7 Units

Spare Plug



Single Unit		
ProTube T1HS-100-01-P		100
Weight	pounds [grams]	0.209 [95]
DIN 43880 Dimension		2 TE / 1.42 [36]
Packaging Dimensions (HxWxL)		4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity		16 Units