


ProBloc EV T2 V Cable Set

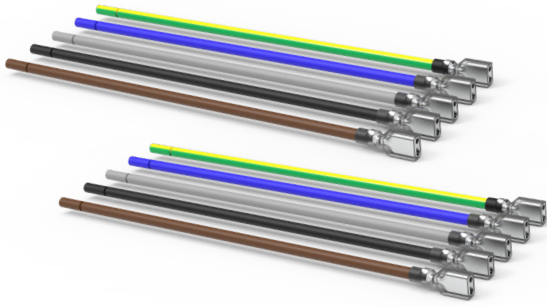

ProBloc EV T2 V Cable Set


Technical Data	
Length	7.8" [200mm]
Conductor Material	Copper
Conductor Cross Section (max)	10 AWG / 6 mm ²
Type of Faston	6.3x0.8
Type of Insulation Sleeve	TE 1-170823-6
Wire Testing Voltage (min)	1500V
Type of Wire	Flexible

Order Information

Order Code	
Cable set 5 (with insulated fast-on connector)	515 792
Cable set 10 (with insulated fast-on connector)	515 764

Dimensions & Packaging

inches [mm]



Complete Unit		
Cable Set 5		
Weight	pounds [grams]	.154 [70]
Cable Set 10		
Weight	pounds [grams]	.309 [140]
Packaging Dimensions (HxWxL)	4.3 × 4.5 × 13.8" [109 × 115 × 352 mm]	
Standard Order Quantity	12 Units	

Information contained in this document is subject to change at any time without notice.

