

Pluggable Single Pole & Multi-pole Surge Protective Devices (SPDs)




Lightning and Overvoltage Protection

ProTec T1HS



Special features:

- Leakage current free hybrid topology
- High discharge capacity due to unique design impulse discharge current of 25 kA
- Energy coordinated with other ProTec families without additional cable length
- State-of-the-art thermal disconnecter
- Backup fuse up to 315 A gG
- Short circuit current rating up to 100 kA*
- Vibration and shock withstand capability
- All modules, also N-PE, with operating state green-red
- Optional remote contact (RC) signaling

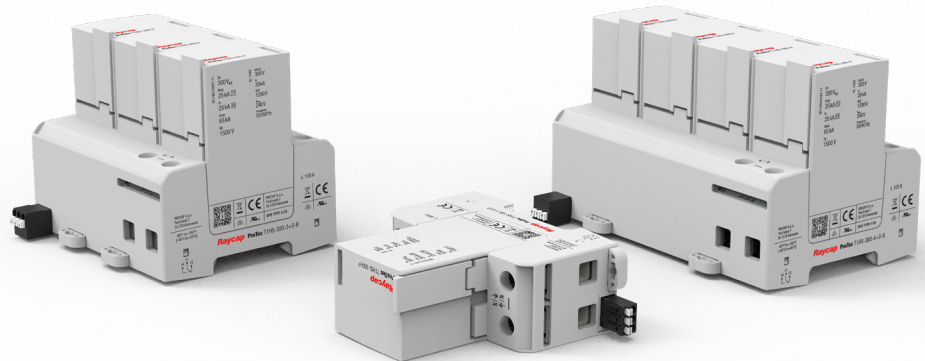

IEC 61643-11:2011

EN 61643-11: 2012+A11:2018

UL 1449 5th Edition



The Type 1+2 modular surge protective device contains two high rated stand-alone varistors in series with a gas discharge tube that, in combination with a state-of-the-art space-saving thermal disconnection mechanism, ensures optimal system protection under all kinds of overloads. The series connection isolates the varistor from the grid, making it suitable for use upstream of meter panels in low-voltage consumer installations while making it immune to temporary overvoltage. The operating state requires no power to operate and instantly shows the health of the surge protective indicator. Besides a visual mechanical indicator, an optional remote contact (RC) device features a three-pole remote signaling terminal to monitor the operating state of the device.



More Product Information

* VDE certified up to 50 kA, 100 kA additionally tested by VDE.



Lightning and Overvoltage Protection

ProTec T1HS 1+0

Class I • Class II • Type 1 • Type 2 • Type 4CA



Location of Use: Main Distribution Boards
 Network Systems: TN-S, TN-C, TT (only L-N)
 Mode of Protection: L-PE, N-PE (only TN-S), L-PEN, L-N
 IEC/EN/UL Category: Class I+II, Type 1+2, Type 4CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11: 2012+A11:2018
 UL 1449 5th Edition



Technical Data

ProTec T1HS-xxx-1+0(-R)

300

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o/U_n	240 V
Maximum Continuous Operating Voltage (AC)	U_c	300 V
Nominal Discharge Current (8/20 μ s)	I_n	25 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	65 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	25 kA
Specific Energy	W/R	156.2 kJ/ Ω
Charge	Q	12.5 As
Voltage Protection Level	U_p	1500 V
Rated Load Current	I_L	100 A
Response Time	t_A	< 100 ns
Overvoltage Category		III
Overcurrent Protection (max)		315 A gG
Short-Circuit Current Rating (AC)	I_{SCCR}	100 kA
TOV Withstand 120min	U_T	442 V
Number of Ports		1

UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	300 V
Measured Limiting Voltage	MLV	1280 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA

Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	1100 V
Minimum Backup fuse, if required		250 A gG


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		4 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III

Internal Configuration

Legend


- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏏ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect



Order Information	
Order Code	300
ProTec T1HS-xxx-1+0	59.A594
ProTec T1HS-xxx-1+0-R (with remote contacts)	59.A595
ProTec T1HS-xxx-P (plug)	59.C669


Dimensions & Packaging

inches [mm]

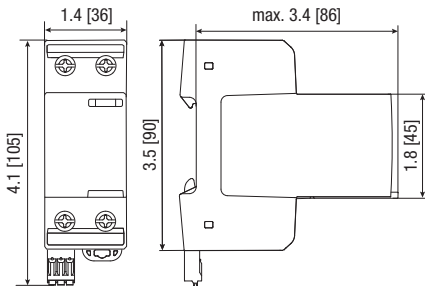

Complete Unit	
ProTec T1HS-xxx-1+0	300
Weight	pounds [grams] .650 [295]
ProTec T1HS-xxx-1+0-R	
Weight	pounds [grams] .670 [304]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity	7 Units

Spare Plug



Single Unit	
ProTec T1HS-xxx-01-P	300
Weight	pounds [grams] .364 [165]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity	16 Units

Lightning and Overvoltage Protection

ProTec T1HS 3+0

Class I • Class II • Type 1 • Type 2 • Type 4CA



Location of Use: Main Distribution Boards
 Network Systems: TN-C
 Mode of Protection: L-PEN
 IEC/EN/UL Category: Class I+II, Type 1+2, Type 4CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11: 2011
 EN 61643-11: 2012+A11:2018
 UL 1449 5th Edition



Technical Data

ProTec T1HS-xxx-3+0(-R)

300

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o/U_n	240 V
Maximum Continuous Operating Voltage (AC)	U_c	300 V
Nominal Discharge Current (8/20 μ s)	I_n	25 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	65 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	25 kA
Specific Energy	W/R	156.2 kJ/ Ω
Charge	Q	12.5 As
Voltage Protection Level	U_p	1500 V
Rated Load Current	I_L	100 A
Response Time	t_A	< 100 ns
Overvoltage Category		III
Overcurrent Protection (max)		315 A gG
Short-Circuit Current Rating (AC)	I_{SCCR}	50 kA
TOV Withstand 120min	U_T	442 V
Number of Ports		1

UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	300 V
Measured Limiting Voltage	MLV	1280 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA

Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	1100 V
Minimum Backup fuse, if required		250 A gG

Additional Electrical Parameters - Extended (Additionally tested by VDE)

Short-Circuit Current Rating (AC)	I_{SCCR}	100 kA
Overcurrent Protection (max)		315 A gG


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		4 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III

Internal Configuration

Legend

- L Line Conductor Terminal
- ⬇ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect

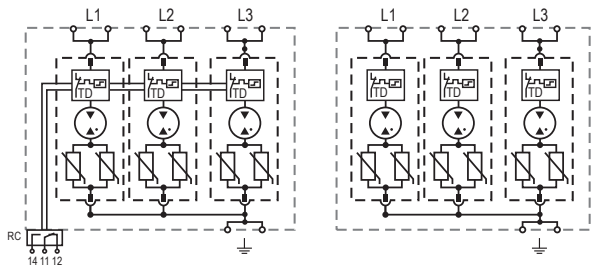


Order Information

Order Code	300
ProTec T1HS-xxx-3+0	59.0304
ProTec T1HS-xxx-3+0-R (with remote contacts)	59.0305
ProTec T1HS-xxx-P (plug)	59.0302


Dimensions & Packaging

inches [mm]

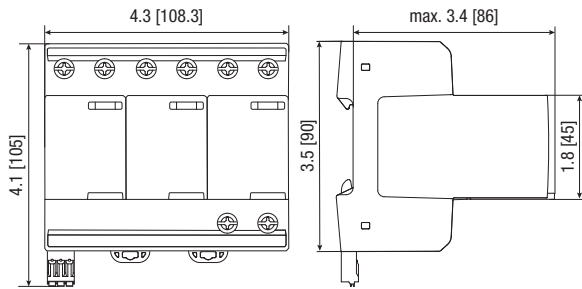

Complete Unit		
ProTec T1HS-xxx-3+0		300
Weight	pounds [grams]	1.892 [858]
ProTec T1HS-xxx-3+0-R		
Weight	pounds [grams]	1.914 [868]
DIN 43880 Dimension	6 TE / 4.3" [108 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	3 Units	

Spare Plug




Single Unit		
ProTec T1HS-xxx-P		300
Weight	pounds [grams]	.364 [165]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	16 Units	

Lightning and Overvoltage Protection

ProTec T1HS 4+0

Class I • Class II • Type 1 • Type 2 • Type 4CA

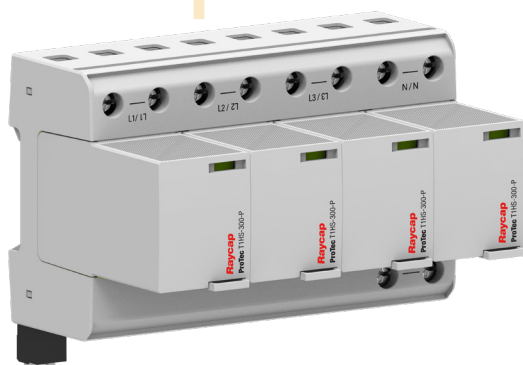

Location of Use: Main Distribution Boards
 Network Systems: TN-S
 Mode of Protection: L-PE, N-PE
 IEC/EN/UL Category: Class I+II, Type 1+2, Type 4CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11: 2011
 EN 61643-11: 2012+A11:2018
 UL 1449 5th Edition



Technical Data

ProTec T1HS-xxx-4+0(-R)

300

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o/U_n	240 V
Maximum Continuous Operating Voltage (AC)	U_c	300 V
Nominal Discharge Current (8/20 μ s)	I_n	25 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	65 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	25 kA
Specific Energy	W/R	156.2 kJ/ Ω
Charge	Q	12.5 As
Voltage Protection Level	U_p	1500 V
Rated Load Current	I_L	100 A
Response Time	t_A	< 100 ns
Overvoltage Category		III
Overcurrent Protection (max)		315 A gG
Short-Circuit Current Rating (AC)	I_{SCCR}	50 kA
TOV Withstand 120min	U_T	442 V
Number of Ports		1

UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	300V
Measured Limiting Voltage	MLV	1280V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA

Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	1100V
Minimum Backup fuse, if required		250 A gG

Additional Electrical Parameters - Extended (Additionally tested by VDE)

Short-Circuit Current Rating (AC)	I_{SCCR}	100 kA
Overcurrent Protection (max)		315 A gG


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		4 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III

Internal Configuration

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏏ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect

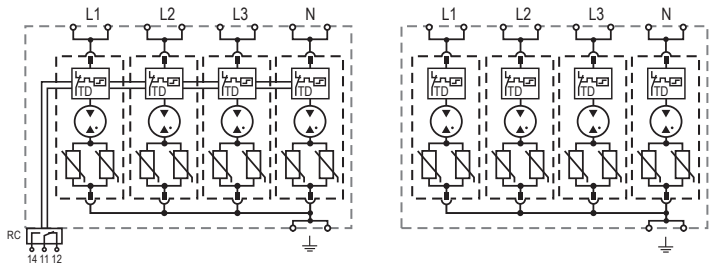


Order Information

Order Code	300
ProTec T1HS-xxx-4+0	59.0260
ProTec T1HS-xxx-4+0-R (with remote contacts)	59.0261
ProTec T1HS-xxx-P (plug)	59.0302

Dimensions & Packaging


inches [mm]

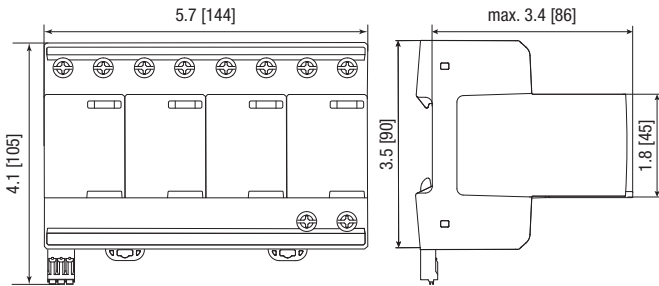

Complete Unit

ProTec T1HS-xxx-4+0		300
Weight	pounds [grams]	2.502 [1135]
ProTec T1HS-xxx-4+0-R		
Weight	pounds [grams]	2.522 [1144]
DIN 43880 Dimension	8 TE / 5.7" [144 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	2 Units	

Spare Plug




Single Unit

ProTec T1HS-xxx-P		300
Weight	pounds [grams]	.364 [165]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	16 Units	

Lightning and Overvoltage Protection

ProTec T1HS 3+1

Class I • Class II • Type 1 • Type 2 • Type 4CA

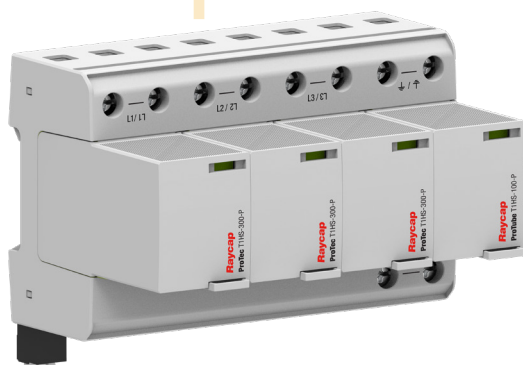

Location of Use: Main Distribution Boards
 Network Systems: TT, TN-S
 Mode of Protection: L-N, N-PE
 IEC/EN/UL Category: Class I+II, Type 1+2, Type 4CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11: 2011
 EN 61643-11: 2012+A11:2018
 UL 1449 5th Edition



Technical Data

ProTec T1HS-xxx-3+1(-R)

300

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o / U_n	240 V
Maximum Continuous Operating Voltage (AC)	(L-N) / (N-PE) U_c	300 V / 305 V
Nominal Discharge Current (8/20 μ s)	(L-N) / (N-PE) I_n	25 kA / 100 kA
Maximum Discharge Current (8/20 μ s)	(L-N) / (N-PE) I_{max}	65 kA / 130 kA
Impulse Discharge Current (10/350 μ s)	(L-N) / (N-PE) I_{imp}	25 kA / 100 kA
Specific Energy	(L-N) / (N-PE) W/R	156.2 kJ/ Ω / 2500 kJ/ Ω
Charge	(L-N) / (N-PE) Q	12.5 As / 50 As
Voltage Protection Level	(L-N) / (N-PE) U_p	1500 V / 1500 V
Rated Load Current	I_L	100 A
Response Time	(L-N) / (N-PE) t_A	< 100 ns / < 100 ns
Overvoltage Category		III
Overcurrent Protection (max)		315 A gG
Short-Circuit Current Rating (AC)	I_{SCCR}	50 kA
Follow Current Interrupt Rating	(N-PE) I_{fi}	100 A
TOV Withstand 120min	(L-N) U_T	442 V
TOV Withstand 200ms	(N-PE) U_T	1200 V
Number of Ports		1

UL Electrical

Maximum Continuous Operating Voltage (AC)	(L-N)/(N-G) MCOV	300 V / 305 V
Measured Limiting Voltage	(L-N)/(N-G) MLV	1280 V / 1000 V
Nominal Discharge Current (8/20 μ s)	(L-N)/(N-G) I_n	20 kA

Additional Electrical Parameters - Standard (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	(L-N) / (N-PE) U_{res}	1100 V / 305 V
Minimum Backup fuse, if required		250 A gG

Additional Electrical Parameters - Extended (Additionally tested by VDE)

Short-Circuit Current Rating (AC)	I_{SCCR}	100 kA
Overcurrent Protection (max)		315 A gG

Mechanical & Environmental


Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		4 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III

Raycap

Internal Configuration

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏏ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect
- TI Thermal Indication

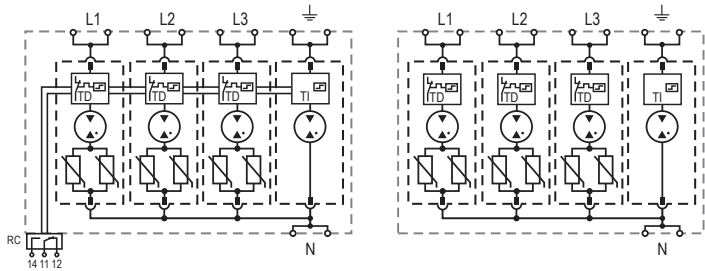


Order Information

Order Code	300
ProTec T1HS-xxx-3+1	59.0306
ProTec T1HS-xxx-3+1-R (with remote contacts)	59.0307
ProTec T1HS-xxx-P (plug L-N)	59.0302
ProTube T1HS-100-P (plug N-PE)	59.0303

Dimensions & Packaging


inches [mm]

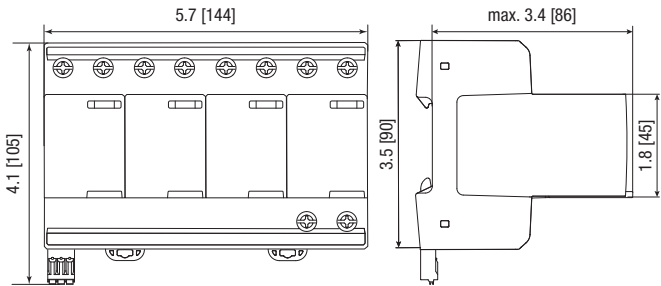

Complete Unit

ProTec T1HS-xxx-3+1		300
Weight	pounds [grams]	2.348 [1065]
ProTec T1HS-xxx-3+1-R		
Weight	pounds [grams]	2.368 [1074]
DIN 43880 Dimension	8 TE / 5.7" [144 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	2 Units	

Spare Plug



Single Unit

ProTec T1HS-xxx-P		300
Weight	pounds [grams]	.364 [165]
ProTube T1HS-100-P		100
Weight	pounds [grams]	0.209 [95]
DIN 43880 Dimension		2 TE / 1.42" [36 mm]
Packaging Dimensions (HxWxL)		4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity		16 Units

Lightning and Overvoltage Protection

ProTube T1HS 0+1

Class I • Class II • Type 1 • Type 2 • Type 4CA



Location of Use: Main Distribution Boards
 Network Systems: TT, TN-S
 Mode of Protection: N-PE
 IEC/EN/UL Category: Class I+II, Type 1+2, Type 4CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11: 2012+A11:2018
 UL 1449 5th Edition



Technical Data

ProTube T1HS-xxx-0+1(-R)

100

IEC Electrical

Nominal AC Voltage (50/60Hz)	U_o / U_n	240 V
Maximum Continuous Operating Voltage (AC)	U_c	305 V
Nominal Discharge Current (8/20 μ s)	I_n	100 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	130 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	100 kA
Specific Energy	W/R	2500 kJ/ Ω
Charge	Q	50 As
Voltage Protection Level	U_p	1500 V
Rated Load Current	I_L	100 A
Response Time	t_A	< 100 ns
Overvoltage Category		III
Follow Current Interrupt Rating	I_{fi}	100 A
TOV Withstand 200ms	U_T	1200 V
Number of Ports		1

UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	305 V
Measured Limiting Voltage	MLV	1000 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA

Additional Electrical Parameters (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	305 V
---	-----------	-------


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		4 AWG (Solid, Stranded) per UL 1449 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III

Internal Configuration

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⏏ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TI Thermal Indication




Order Information

Order Code	100
ProTube T1HS-xxx-0+1	59.A596
ProTube T1HS-xxx-0+1-R (with remote contacts)	59.A597
ProTube T1HS-100-P (plug)	59.C670


Dimensions & Packaging

inches [mm]

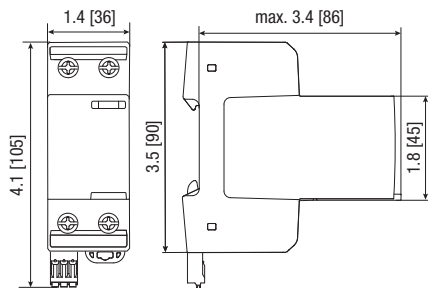

Complete Unit		
ProTube T1HS-xxx-0+1		300
Weight	pounds [grams]	.496 [225]
ProTube T1HS-xxx-0+1-R		
Weight	pounds [grams]	.515 [234]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	7 Units	

Spare Plug



Single Unit		
ProTube T1HS-100-P		100
Weight	pounds [grams]	0.209 [95]
DIN 43880 Dimension	2 TE / 1.42" [36 mm]	
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity	16 Units	