

DATASHEET

Multi-Pole Base for Photovoltaic Systems ProTec T2-PV-5Y-00(-R) Class II • Type 2 • PV SPD Type 1CA



Location of Use: String box, Inverter
Mode of Protection: (+)-PE, (-)-PE, (+)-(-)
IEC/EN/UL Category: Class II / Type 2 / PV SPD Type 1CA
Housing: Pluggable Design
Compliance: IEC 61643-31:2018
EN 61643-31:2019
UL 1449 5th Edition



Technical Data

ProTec T2-xxxxPV-5Y-00(-R)

1100

EN Electrical

Maximum Continuous Operating Voltage (PV)	U_{CPV}	1100 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA
Total Discharge Current (8/20 μ s)	I_{Total}	50 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	40 kA
Voltage Protection Level	(+/-)-PE U_p	3800 V
	(+)-(-) U_p	3800 V
Overvoltage Category		III
Short-Circuit Current Rating	I_{SCPV}	11 kA
Number of Ports		1

UL Electrical

Maximum Permitted DC Voltage	V_{pVdc}	1100 V
Voltage Protection Level	(+/-)-PE V_{PR}	2500 V
	(+)-(-) V_{PR}	2500 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA
Short-Circuit Current Rating	SCCR	50 kA

Additional Electrical Parameters (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	3000 V
---	-----------	--------

Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]
Permissible Operating Humidity	RH	5%...95%
Pollution Degree		2
Altitude (max)		13123 ft [4000 m]
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree Of Protection		IP 20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		Green Flag / Not Green Flag
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)
Overvoltage Category		III


Raycap

Information contained in this document is subject to change at any time without notice.
No part of this document may be reproduced or used without written permission from Raycap.

Internal Configuration

Legend

- +/-, -/+ + or - Conductor Terminal
- ⏏ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect

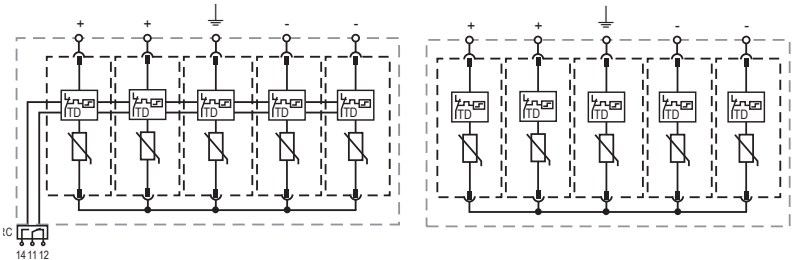


Order Information

Order Code	1100
ProTec T2-xxxxPV-5Y-00	59.A452
ProTec T2-xxxxPV-5Y-00-R (with remote contacts)	59.A453
ProTec T2-550PV-00-P (plug)	59.A454

Dimensions & Packaging


inches [mm]

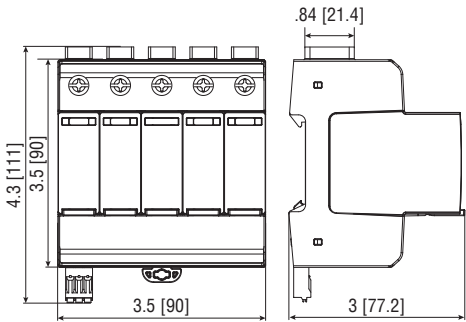

Complete Unit

ProTec T2-xxxxPV-5Y-00	1100
Weight pounds [grams]	1.313 [596]
ProTec T2-xxxxPV-5Y-00-R	
Weight pounds [grams]	1.329 [603]
DIN 43880 Dimension	5 TE / 3.5" [90 mm]
Packaging Dimensions (H x W x L)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]
Standard Order Quantity	3 Units

Spare Plug



Single Unit

ProTec T2-xxxPV-00-P	550
Weight pounds [grams]	.145 [66]
Single Unit DIN 43880 Dimension	1 TE / .71" [18 mm]
Packaging Dimensions (H x W x L)	3.2 x 4.5 x 12" [83 x 116 x 305 mm]
Standard Order Quantity	24 Units