

Overvoltage Protection

SafeTec T2 4+0

Class II • Type 2 • Type 1CA



Location of Use: Sub-distribution Boards
 Network Systems: TN-S
 Mode of Protection: L-PE, N-PE
 IEC/EN/UL Category: Class II / Type 2 / Type 1CA
 Safety: Current Limiting Technology
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012+A11:2018
 UL 1449 5th Edition



Technical Data

SafeTec T2-xxx-4+0(-R)

		150	300	350	480	550
IEC Electrical						
Nominal AC Voltage (50/60Hz)	U_o/U_n	120 V	240 V	277 V	400 V	400 V
Maximum Continuous Operating Voltage (AC)	U_c	150 V	300 V	350 V	480 V	550 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	20 kA	20 kA	20 kA	20 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	50 kA	50 kA	50 kA	50 kA	50 kA
Voltage Protection Level	U_p	1250 V	1650 V	1750 V	2300 V	2500 V
Response Time	t_A	< 25 ns				
Overvoltage Category		III				
Overcurrent Protection (max)		315 A/250 A gG				
Short-Circuit Current Rating (AC)	I_{SCCR}	25 kA/50 kA				
TOV Withstand 120min	U_T	255 V	442 V	529 V	762 V	918 V
Number of Ports		1				

UL Electrical

Maximum Continuous Operating Voltage (AC)	MCOV	150 V	300 V	350 V	480 V	550 V
Voltage Protection Rating	VPR	700 V	1200 V	1200 V	1500 V	1800 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	20 kA	20 kA	20 kA	20 kA
Short-Circuit Current Rating (AC)	SCCR	200 kA	150 kA	200 kA	200 kA	200 kA

Additional Electrical Parameters (Tests performed within Raycap testing laboratory only)

Residual Voltage at 5 kA (8/20 μ s)	U_{res}	750 V	1000 V	1300 V	1600 V	1900 V
Minimum Backup fuse, if required		80 A gG				


Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]				
Permissible Operating Humidity	RH	5%...95%				
Pollution Degree		2				
Altitude (max)		13123 ft [4000m]				
Terminal Screw Torque	M_{max}	40 lbf-in [4.5 Nm]				
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)				
Mounting		35 mm DIN Rail, EN 60715				
Degree of Protection		IP 20 (built-in)				
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0				
Thermal Protection		Yes				
Operating State / Fault Indication		Green Flag / Not Green Flag				
Remote Contacts (RC)		Optional				
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A				
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)				
Overvoltage Category		III				

Internal Configuration

Legend

<i>L</i>	Line Conductor Terminal
<i>N</i>	Neutral Conductor Terminal
	PE/G Conductor Terminal
<i>RC</i>	Remote Contacts Terminal (Optional)
<i>TC</i>	Thermal Control Function
<i>TD</i>	Thermal Disconnecter

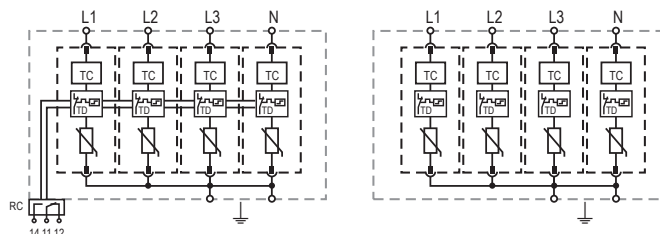


Order Information

Order Code	150	300	350	480	550
SafeTec T2-xxx-4+0	59.0176	59.0178	59.0180	59.0182	59.0184
SafeTec T2-xxx-4+0-R (with remote contacts)	59.0177	59.0179	59.0181	59.0183	59.0185
SafeTec T2-xxx-P (plug)	59.0126	59.0127	59.0128	59.0129	59.0299

Dimensions & Packaging


inches [mm]

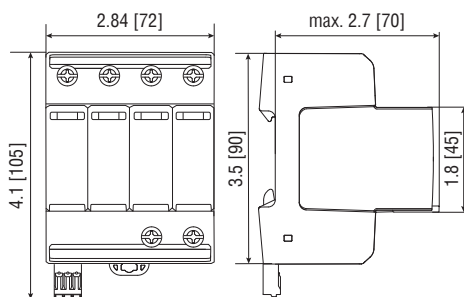

Complete Unit

SafeTec T2-xxx-4+0		150	300	350	480	550
Weight	pounds	1.070	1.097	1.167	1.1756	1.220
	grams	485	497	529	533	553
SafeTec T2-xxx-4+0-R						
Weight	pounds	1.090	1.117	1.187	1.196	1.240
	grams	494	506	538	542	562
DIN 43880 Dimension			4 TE / 2.84" [72 mm]			
Packaging Dimensions (HxWxL)			4.3 × 4.5 × 13.8" [109 × 115 × 352 mm]			
Standard Order Quantity			4 Units			

Spare Plug



Single Unit

SafeTec T2-xxx-P		150	300	350	480	550
Weight	pounds	.139	.146	.163	.165	.176
	grams	63	66	74	75	80
DIN 43880 Dimension			1 TE / .71" [18 mm]			
Packaging Dimensions (HxWxL)			3.2 x 4.5 x 12" [83 x 116 x 305 mm]			
Standard Order Quantity			24 Units			