




Features

- Audio alarm SPD failure indication
- Red LED visual SPD failure indication
- Button for acknowledging and silencing the alarm
- Multiple SPDs connected to one ProAlarm II
- Rated voltage AC: 110V-230V

Typical Installation

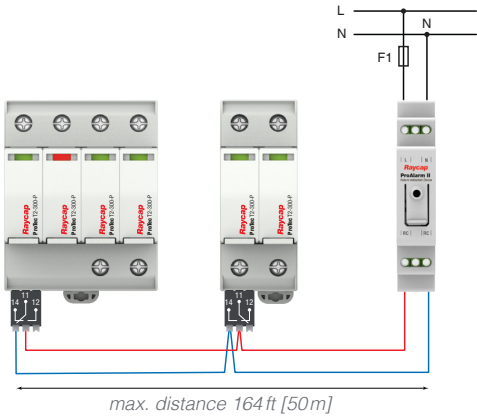

ProAlarm II is a failure indication device that informs the user of the need to replace a failed SPD. It can be quickly and easily installed next to the SPD on the same rail, by making a connection between the RC contacts of the SPD and the alarm unit.

If an SPD fails, the user is informed by a loud audible beeping sound and the illumination of a red LED.

The alarm can be silenced with the press of a button, leaving the LED illuminated until the SPD has been replaced.


Technical Data

inches [mm]

Electrical	
ProAlarm II Order Code	130 562
Rated Voltage (AC)	110 - 230V
Rated Frequency	50 Hz - 60 Hz
Rated Current	0mA
Rated Current (Beeping)	10mA (110V); 21 mA (230V)
Overcurrent Protection (max)	16 A
RC Rated Current	10mA (110V); 21 mA (230V)
TOV Withstand 120min ⁽¹⁾	442V
Maximum Discharge Current [I_{max}] (8/20 μ s) ^{(1) (2)}	50 kA
Impulse Discharge Current [I_{imp}] (10/350 μ s) ^{(1) (3)}	12.5 kA
Mechanical	
Overvoltage Category	III
Mounting Method EN 60715	35 mm DIN Rail
Operating Temperature	-20 °C to +70 °C [-4 °F to + 158 °F]
Enclosure Material	Thermoplastic; Extinguishing Degree UL 94 V-0
Environmental Ingress Protection (IP) Rating	IP 20
Operating State / Display	Red LED / Audible Alarm
Sound Power Level [L_{WA}]	70 dB
Dimensions DIN 43880	1TE
Packaging Dimension (L x W x D)	3.1" x 0.9" x 4.3" [77.8 x 23 x 108 mm]
Weight	.12 lbs [53 g]
Standards Compliance & Certifications	
Standards	IEC 61010-1:2010+A1:2016, EN 61010-1:2010+A1:2019
Certification	RoHS, CE

⁽¹⁾ per IEC/EN 61643-11 ⁽²⁾ Only in parallel with T2 SPD where $U_c \leq 350V$. ⁽³⁾ Only in parallel with T1 SPD where $U_c \leq 350V$.

Product Diagram

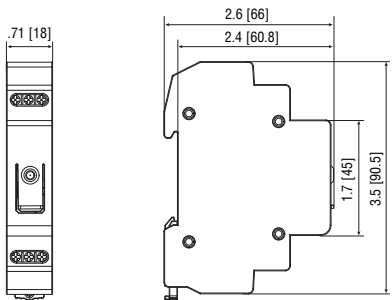

Information contained in this document is subject to change at any time without notice. No part of this document may be reproduced or used without written permission from Raycap.